
"LYNX"®

Lawrence & Mayo
ESTD.1877



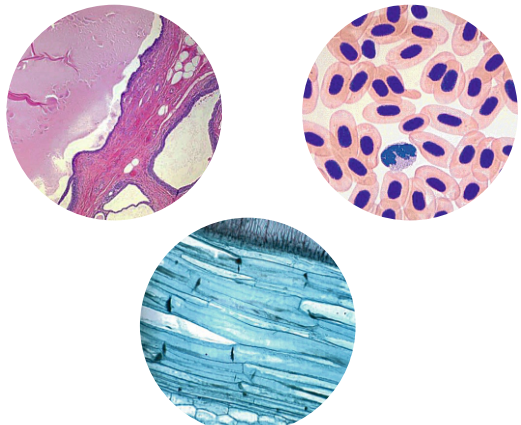

LM-56-VAFA (VERTICAL AUTOCLAVE FULLY AUTOMATIC) SERIES

"LYNX"®

Lawrence & Mayo
ESTD.1877

TECHNICAL SPECIFICATIONS VERTICAL AUTOCLAVE FULLY AUTOMATIC LM-56-VAFA SERIES

	LM-56-VAFA101822	LM-56-VAFA122035	LM-56-VAFA142253	LM-56-VAFA1824100	LM-56-VAFA2230178	LM-56-VAFA2236215
Construction & Capacity & Size	Double Walled Construction Inner and Outer Completely made of Stainless Steel 304 Capacity 22 (Litres Usable) Inner Size Dia x Ht. 10"x 18"	Double Walled Construction Inner and Outer Completely made of Stainless Steel 304 Capacity 35 (Litres Usable) Inner Size Dia x Ht. 12" x 20"	Double Walled Construction Inner and Outer Completely made of Stainless Steel 304 Capacity 53 (Litres Usable) Inner Size Dia x Ht. 14" x 22"	Double Walled Construction Inner and Outer Completely made of Stainless Steel 304 Capacity 100 (Litres Usable) Inner Size Dia x Ht. 18" x 24"	Double Walled Construction Inner and Outer Completely made of Stainless Steel 304 Capacity 178 (Litres Usable) Inner Size Dia x Ht. 22" x 30"	Double Walled Construction Inner and Outer Completely made of Stainless Steel 304 Capacity 35 (Litres Usable) Inner Size Dia x Ht. 22" x 36"
Lid Opening & Safety Features	Foot lifting arrangement & heavy gauge Dia. Press lid fitted with 2 Safety Valve (1 Steam Release Valve & Pressure Gauge) Also fitted with Electrical Safety Feature M.C.B. Solenoid Valve works for automatic purging and automatic steam release when cycle time is completely saftey protection for heater Low Water Level cut off heater when water level is not proper	Foot lifting arrangement & heavy gauge Dia. Press lid fitted with 2 Safety Valve (1 Steam Release Valve & Pressure Gauge) Also fitted with Electrical Safety Feature M.C.B. Solenoid Valve works for automatic purging and automatic steam release when cycle time is completely saftey protection for heater Low Water Level cut off heater when water level is not proper	Foot lifting arrangement & heavy gauge Dia. Press lid fitted with 2 Safety Valve (1 Steam Release Valve & Pressure Gauge) Also fitted with Electrical Safety Feature M.C.B. Solenoid Valve works for automatic purging and automatic steam release when cycle time is completely saftey protection for heater Low Water Level cut off heater when water level is not proper	Foot lifting arrangement & heavy gauge Dia. Press lid fitted with 2 Safety Valve (1 Steam Release Valve & Pressure Gauge) Also fitted with Electrical Safety Feature M.C.B. Solenoid Valve works for automatic purging and automatic steam release when cycle time is completely saftey protection for heater Low Water Level cut off heater when water level is not proper	Foot lifting arrangement & heavy gauge Dia. Press lid fitted with 2 Safety Valve (1 Steam Release Valve & Pressure Gauge) Also fitted with Electrical Safety Feature M.C.B. Solenoid Valve works for automatic purging and automatic steam release when cycle time is completely saftey protection for heater Low Water Level cut off heater when water level is not proper	Foot lifting arrangement & heavy gauge Dia. Press lid fitted with 2 Safety Valve (1 Steam Release Valve & Pressure Gauge) Also fitted with Electrical Safety Feature M.C.B. Solenoid Valve works for automatic purging and automatic steam release when cycle time is completely saftey protection for heater Low Water Level cut off heater when water level is not proper
Temp. Control	Temperature Controlled by Microprocessor P.I.D. Controller with timer and purging system P.I.D Controller	Temperature Controlled by Microprocessor P.I.D. Controller with timer and purging system P.I.D Controller	Temperature Controlled by Microprocessor P.I.D. Controller with timer and purging system P.I.D Controller	Temperature Controlled by Microprocessor P.I.D. Controller with timer and purging system P.I.D Controller	Temperature Controlled by Microprocessor P.I.D. Controller with timer and purging system P.I.D Controller	Temperature Controlled by Microprocessor P.I.D. Controller with timer and purging system P.I.D Controller
Working Temperature & Heater Rating	121 Deg. Celsius to 125 Deg. Celsius 2Kw Rating Heater	121 Deg. Celsius to 125 Deg. Celsius 2.5Kw Rating Heater	121 Deg. Celsius to 125 Deg. Celsius 3Kw Rating Heater	121 Deg. Celsius to 125 Deg. Celsius 4Kw Rating Heater	121 Deg. Celsius to 125 Deg. Celsius 6Kw Rating Heater	121 Deg. Celsius to 125 Deg. Celsius 6Kw Rating Heater
Working Pressure	Is upto 15 PSI	Is upto 15 PSI	Is upto 15 PSI	Is upto 15 PSI	Is upto 15 PSI	Is upto 15 PSI
Basket	Stainless Steel Perforated Basket to keep material	Stainless Steel Perforated Basket to keep material	Stainless Steel Perforated Basket to keep material	Stainless Steel Perforated Basket to keep material	Stainless Steel Perforated Basket to keep material	Stainless Steel Perforated Basket to keep material





Warranty is subject to manufacturing defects only
Water Damage, Physical Damage & Electrical Damage
is not covered under warranty and manufacturing defects

LAWRENCE & MAYO INDIA PVT. LTD. Tel.: 022 - 22078801
274, Dr. D.N. Road, Fort Email: vb@lynxinst.com
Mumbai - 400001 Website: www.lynxinst.com

With the policy of continuous development Lawrence & Mayo reserves the right to change the design and specifications without prior notice